
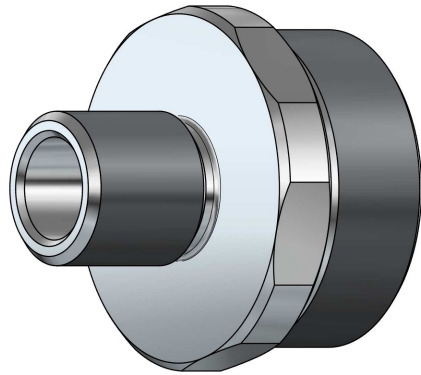




SMARTEC

Series 06



AM06-G125

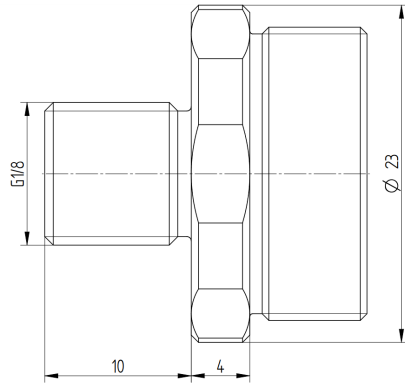

AM06-G250

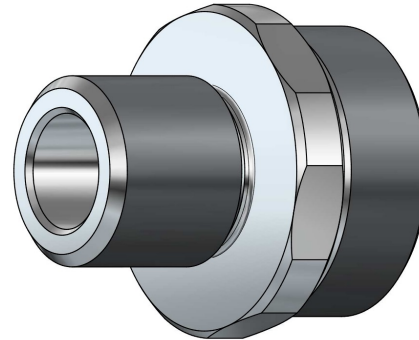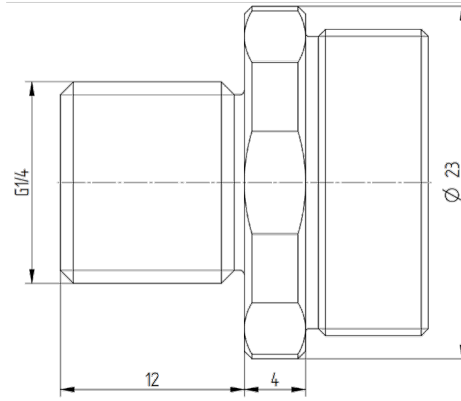

AM06-G375

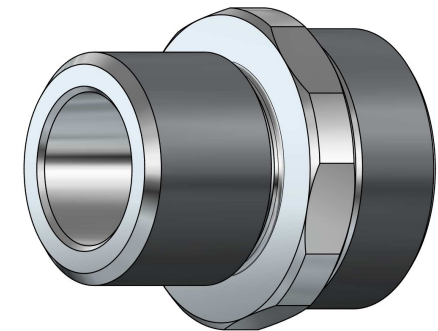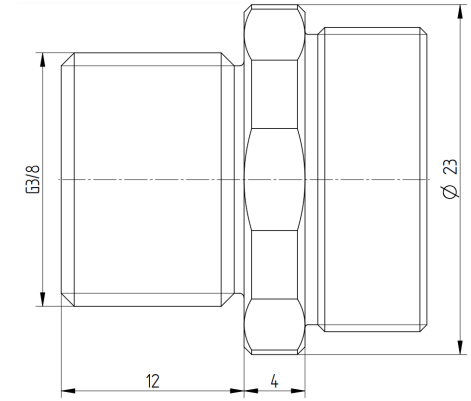

S06 Machine Adaptor G1/8

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 4 [mm] (0.16")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Thread: G1/8
Material: Austenitic Stainless Steel
Temperature Range: -30°C to 120°C (-20°F to 250°F)



S06 Machine Adaptor G1/4

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 4 [mm] (0.16")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Thread: G1/4
Material: Austenitic Stainless Steel
Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Machine Adaptor G3/8

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 4 [mm] (0.16")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Thread: G3/8
Material: Austenitic Stainless Steel
Temperature Range: -30°C to 120°C (-20°F to 250°F)

AS06-TS03

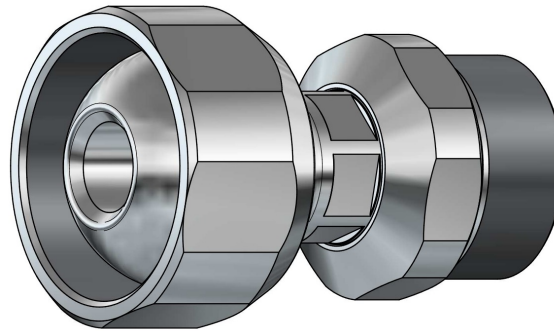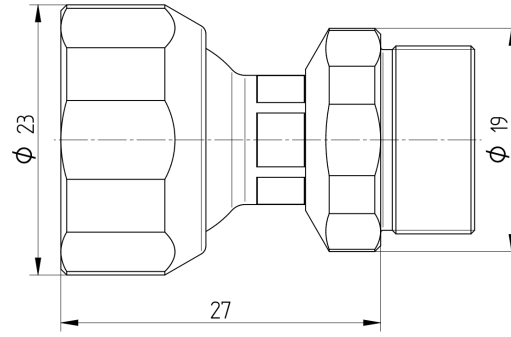

S06 to S03 Series Adaptor

SmarTec Line: S06

Base Line: S06

Secondary Line: S03

External Diameter: 23 [mm] (0.9")

Effective Length: 27 [mm] (1.06")

Internal Diameter: 3.5 [mm] (0.14")


Tooling: SW 22, SW18

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)



CH06A

S06 Chain Unit Straight Short

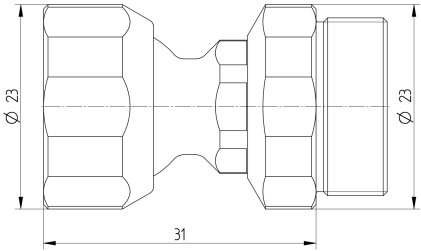



SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 31 [mm] (1.2")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-AS

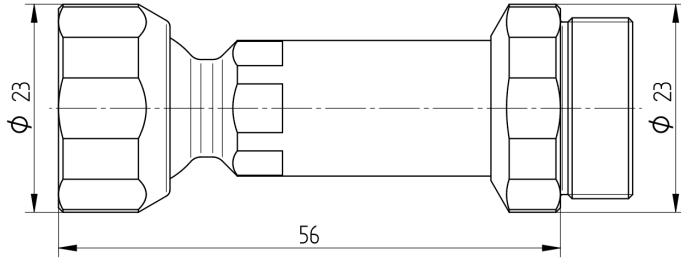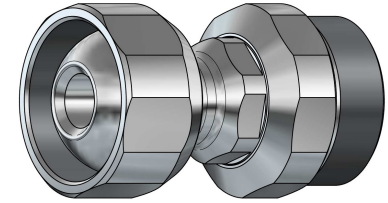

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 56 [mm] (2.2")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)


CH06-AM

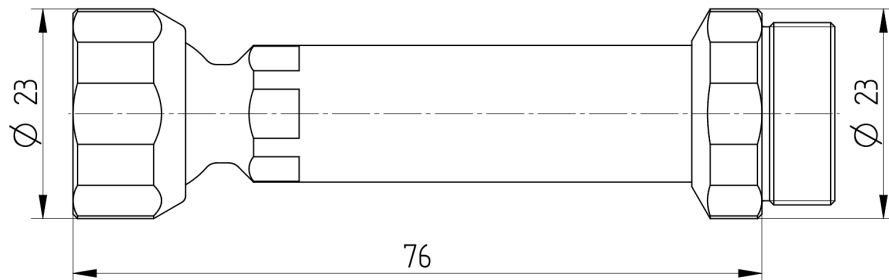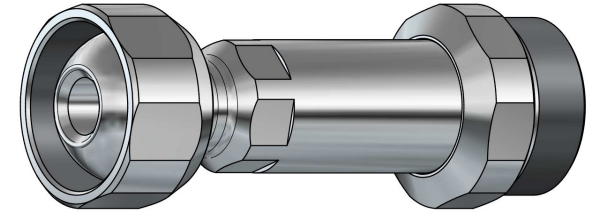




SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 76 [mm] (3")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit Straight Long

CH06-AL

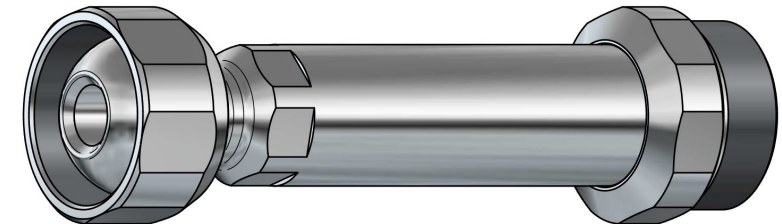

CH06F

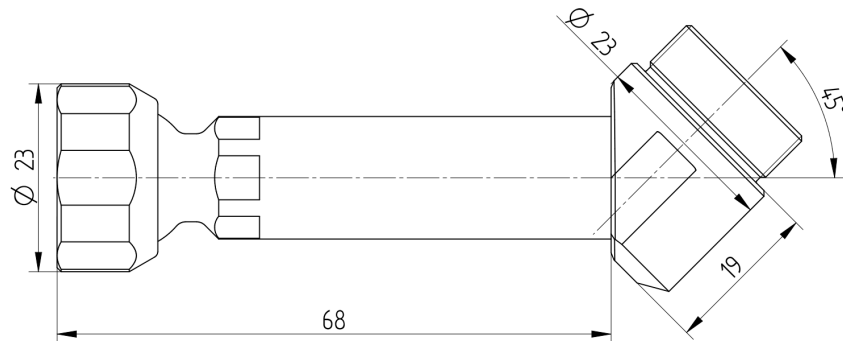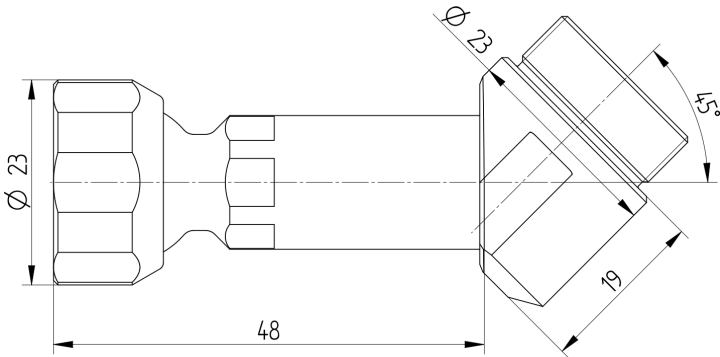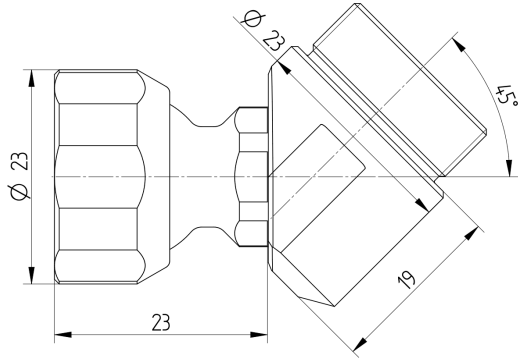

S06 Chain Unit 45° Short

SmarTec Line: S06

Angle: 45°

External Diameter: 23 [mm] (0.9")

Effective Length: 23, 19 [mm] (0.9", 0.75")


Internal Diameter: 6.5 [mm] (0.256")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-FS

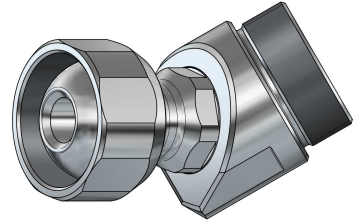

S06 Chain Unit 45° Mean

SmarTec Line: S06

Angle: 45°

External Diameter: 23 [mm] (0.9")

Effective Length: 48, 19 [mm] (1.9", 0.75")


Internal Diameter: 6.5 [mm] (0.256")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-FM

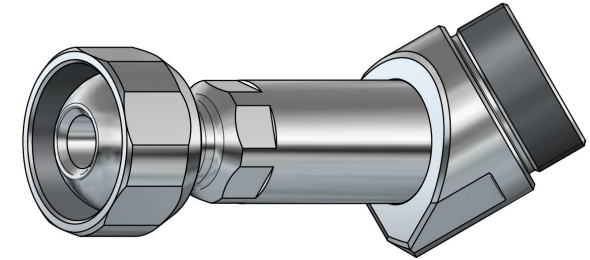

S06 Chain Unit 45° Long

SmarTec Line: S06

Angle: 45°

External Diameter: 23 [mm] (0.9")

Effective Length: 68, 19 [mm] (2.68", 0.75")


Internal Diameter: 6.5 [mm] (0.256")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-FL


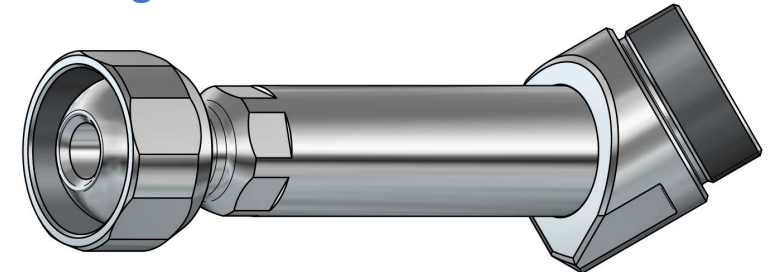


CH06P

S06 Chain Unit 90° Short

SmarTec Line: S06
Angle: 90°
External Diameter: 23 [mm] (0.9")
Effective Length: 31, 11 [mm] (1.2", 0.43")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



CH06-PS

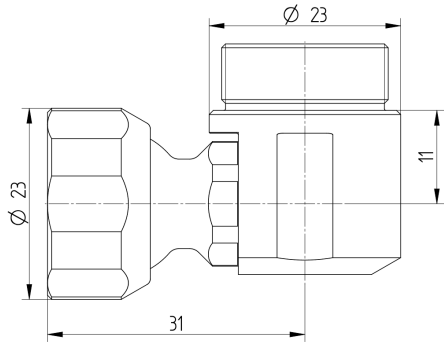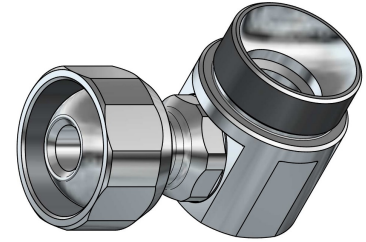

S06 Chain Unit 90° Mean

SmarTec Line: S06
Angle: 90°
External Diameter: 23 [mm] (0.9")
Effective Length: 56, 11 [mm] (2.2", 0.43")
Internal Diameter: 6.5 [mm]
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



CH06-PM

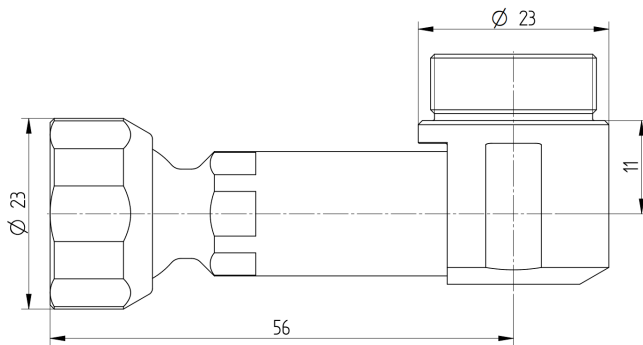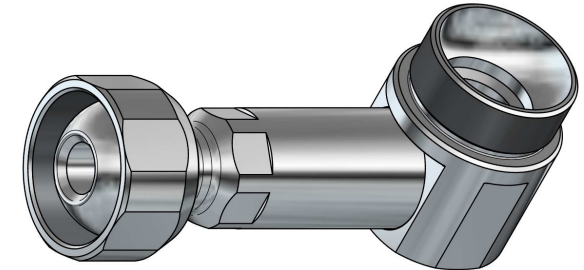




S06 Chain Unit 90° Long

SmarTec Line: S06
Angle: 90°
External Diameter: 23 [mm] (0.9")
Effective Length: 76, 11 [mm] (3", 0.43")
Internal Diameter: 6.5 [mm] (0.256")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-PL

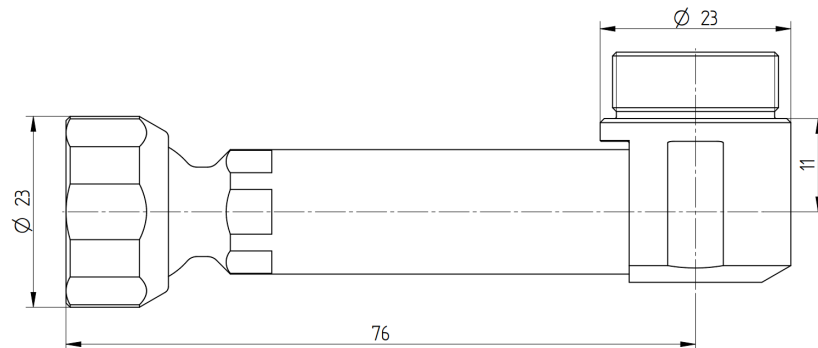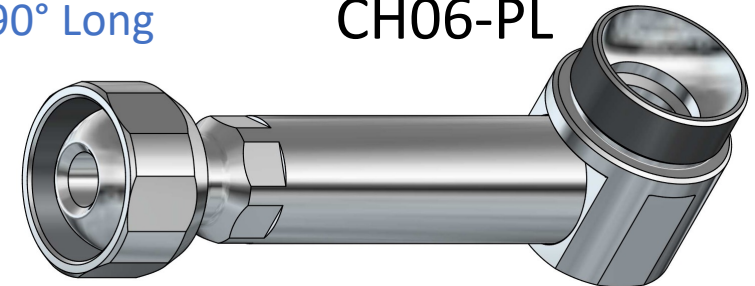

CH06T

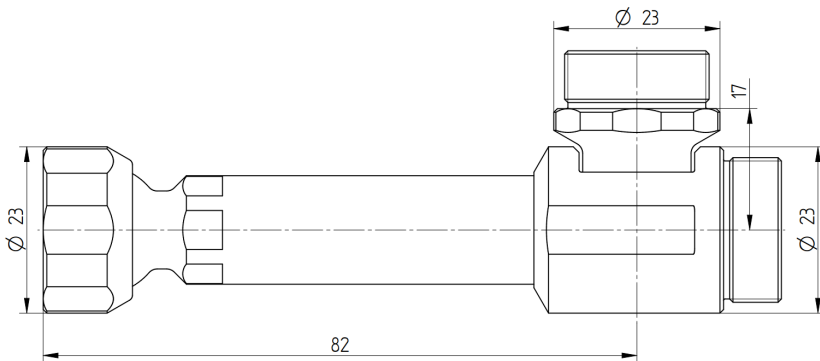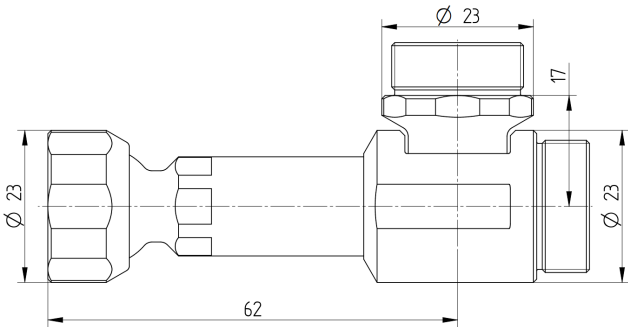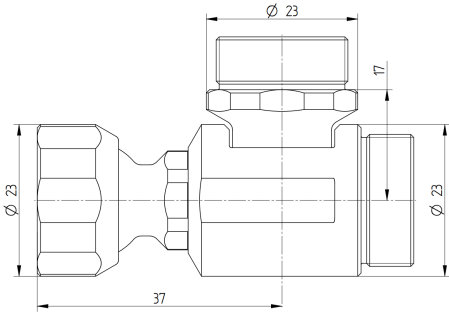

SmarTec Line: S06

Angle: 90° + 90°

External Diameter: 23 [mm] (0.9")

Effective Length: 37, 17 [mm] (1.45", 0.67")

Internal Diameter: 6.5 [mm] (0.256")


Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit T Short

CH06-TS

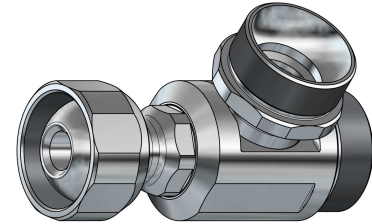

SmarTec Line: S06

Angle: 90° + 90°

External Diameter: 23 [mm] (0.9")

Effective Length: 62, 17 [mm] (2.44", 0.67")

Internal Diameter: 6.5 [mm] (0.256")


Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit T Mean

CH06-TM

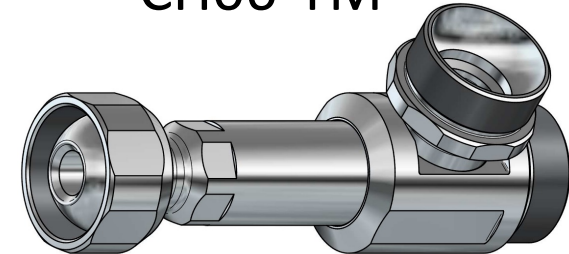

SmarTec Line: S06

Angle: 90° + 90°

External Diameter: 23 [mm] (0.9")

Effective Length: 82, 17 [mm] (3.2", 0.67")

Internal Diameter: 6.5 [mm] (0.256")


Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)



Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit T Long

CH06-TL

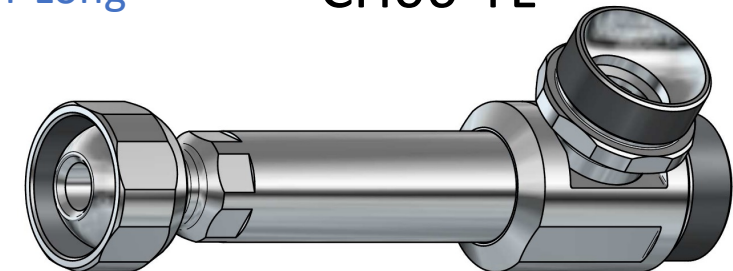

CH06-TD

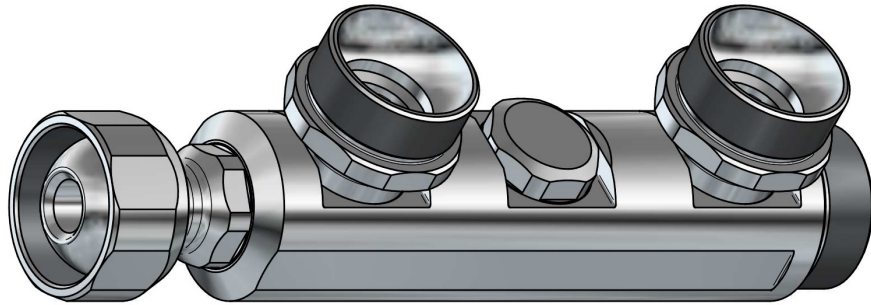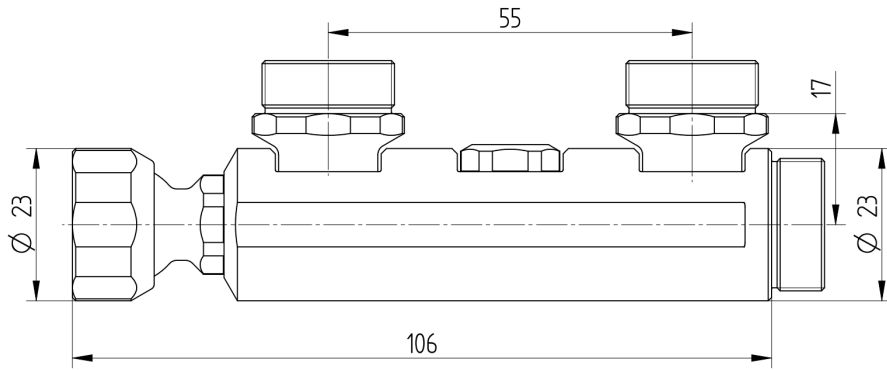

S06 Chain Unit T Dual Exit

SmarTec Line: S06

Angle: 90° + 90°

No. of Exits: 2

External Diameter: 23 [mm] (0.9")

Effective Length: 106, 55 [mm] (4.17", 2.16")



Internal Diameter: 6.5 [mm] (0.256")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-TT

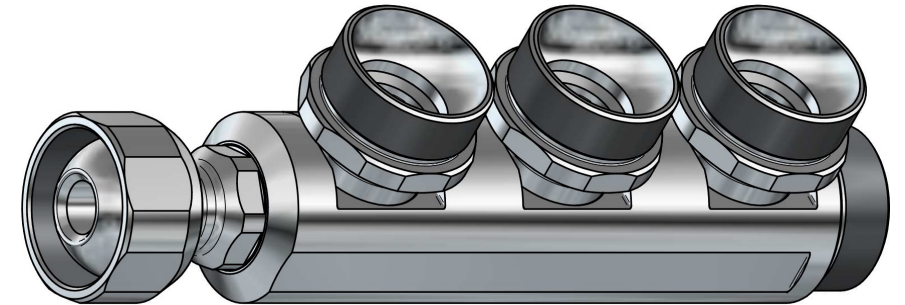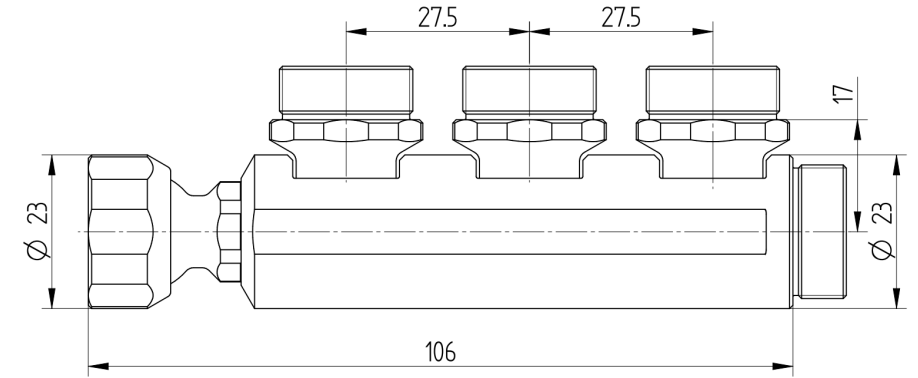

S06 Chain Unit T Triple Exit

SmarTec Line: S06

Angle: 90° + 90°

No. of Exits: 3

External Diameter: 23 [mm] (0.9")


Effective Length: 106, 27.5 [mm] (4.17", 1.1")

Internal Diameter: 6.5 [mm] (0.256")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)


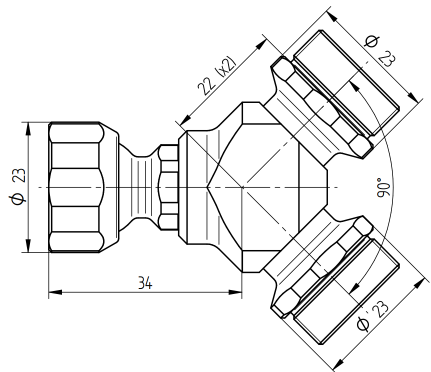


CH06Y

S06 Chain Unit Y Short

SmarTec Line: S06
 Angle: 45° + 45°
 External Diameter: 23 [mm] (0.9")
 Effective Length: 34, 22, 22 [mm] (1.34", 0.87", 0.87")
 Internal Diameter: 6.5 [mm] (0.256")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



CH06-YS

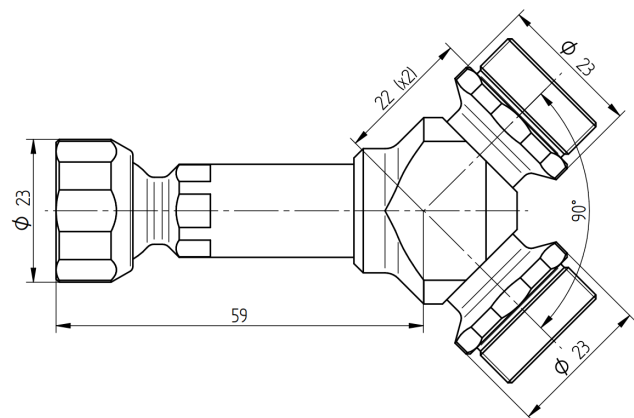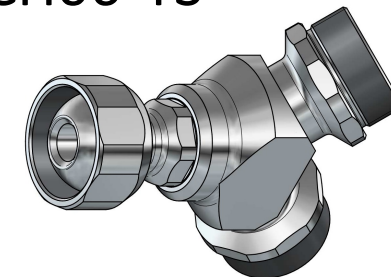

S06 Chain Unit Y Mean

SmarTec Line: S06
 Angle: 45° + 45°
 External Diameter: 23 [mm] (0.9")
 Effective Length: 59, 22, 22 [mm] (2.3", 0.87", 0.87")
 Internal Diameter: 6.5 [mm] (0.256")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)


CH06-YM

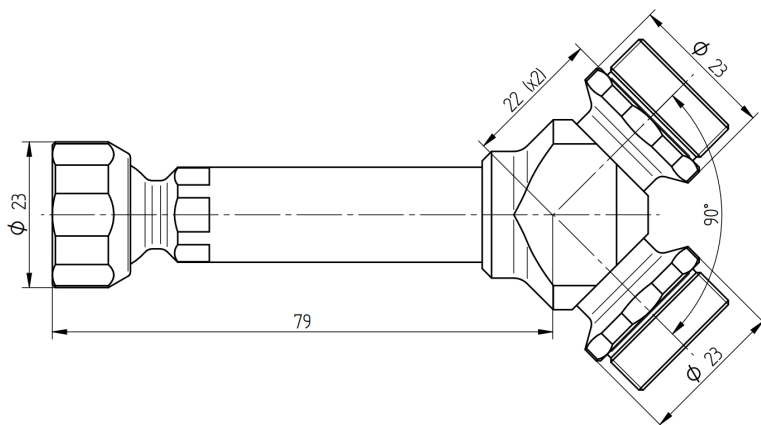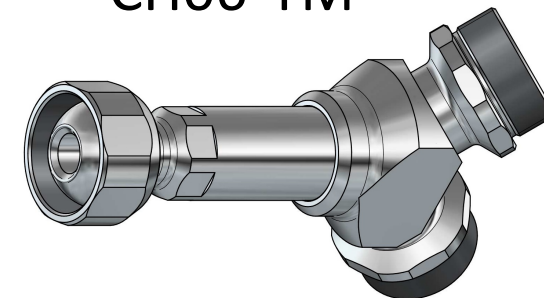



S06 Chain Unit Y Long

SmarTec Line: S06
 Angle: 45° + 45°
 External Diameter: 23 [mm] (0.9")
 Effective Length: 79, 22, 22 [mm] (3.1", 0.87", 0.87")
 Internal Diameter: 6.5 [mm] (0.256")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



CH06-YL

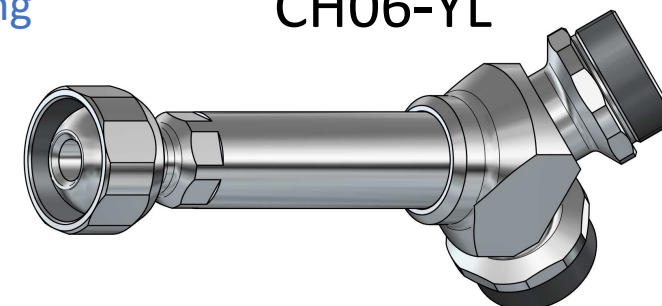

CH06-X2

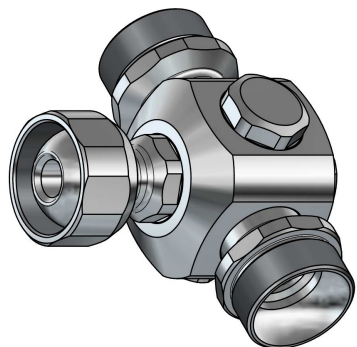
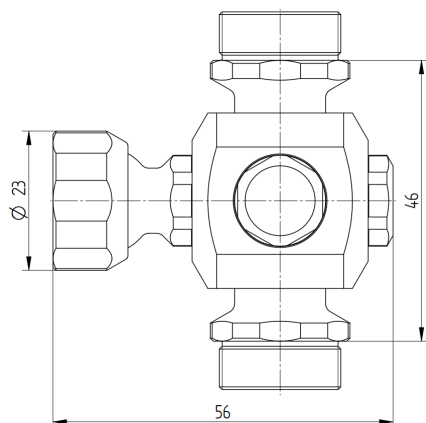


CH06-X3

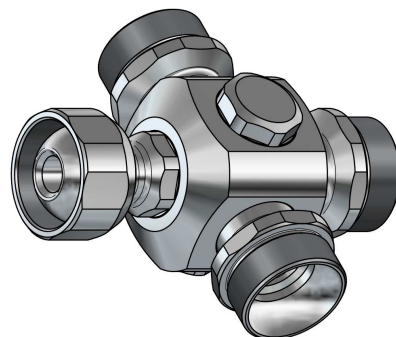
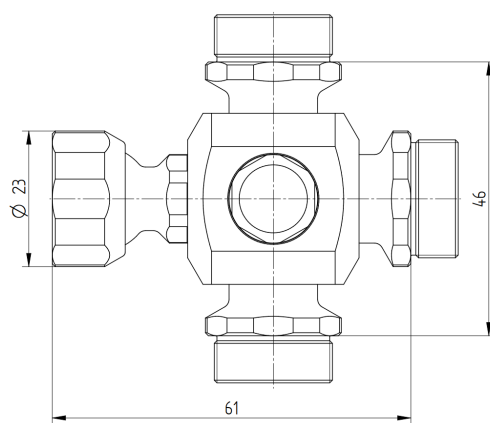


CH06X

CH06-X4

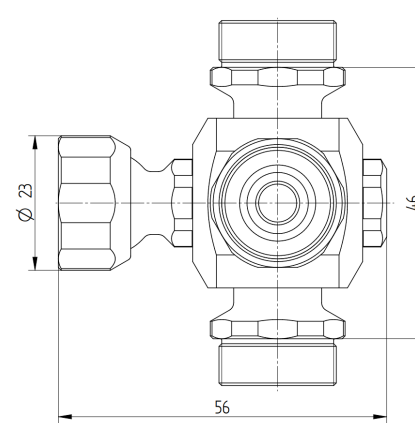

CH06-X5

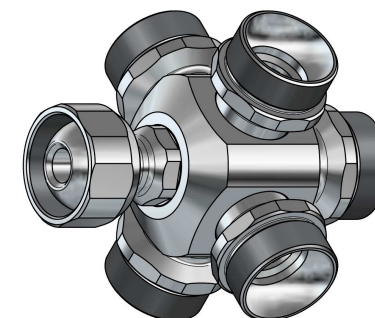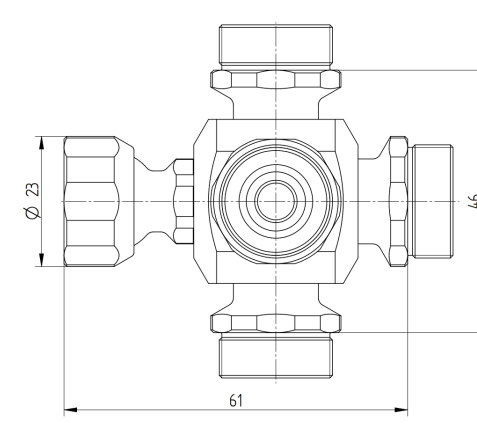

S06 Chain Unit X2 Exits

SmarTec Line: S06
 Angle: 90°
 No. of Exits: 2
 External Diameter: 23 [mm] (0.9")
 Effective Length: 56, 46 [mm] (2.2", 1.8")
 Internal Diameter: 9.5 [mm] (0.374")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit X3 Exits

SmarTec Line: S06
 Angle: 90°
 No. of Exits: 3
 External Diameter: 23 [mm] (0.9")
 Effective Length: 61, 46 [mm] (2.4", 1.8")
 Internal Diameter: 9.5 [mm] (0.374")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit X4 Exits



SmarTec Line: S06
 Angle: 90°
 No. of Exits: 4
 External Diameter: 23 [mm] (0.9")
 Effective Length: 56, 46 [mm] (2.2", 1.8")
 Internal Diameter: 9.5 [mm] (0.374")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Unit X5 Exits



SmarTec Line: S06
 Angle: 90°
 No. of Exits: 5
 External Diameter: 23 [mm] (0.9")
 Effective Length: 61, 46 [mm] (2.4", 1.8")
 Internal Diameter: 9.5 [mm] (0.374")
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06E

CH06-EF

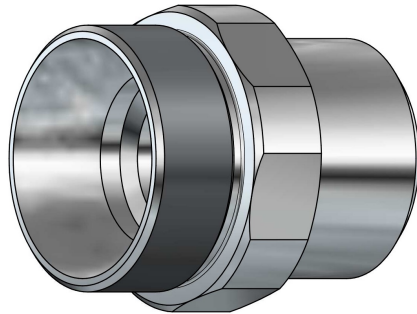
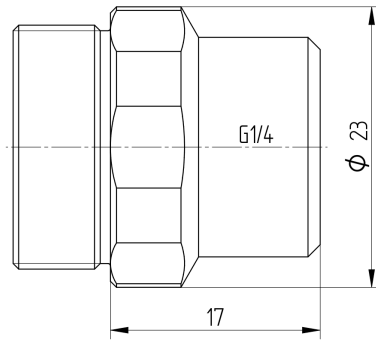


Pipe Seamless Schedules 40 / 80

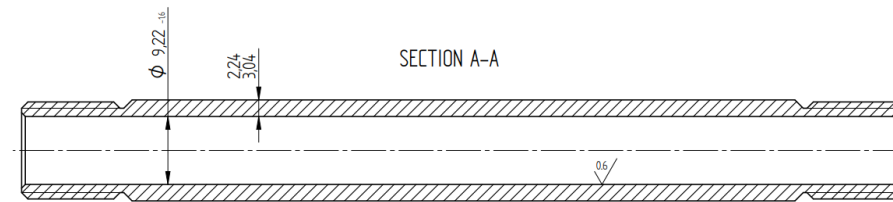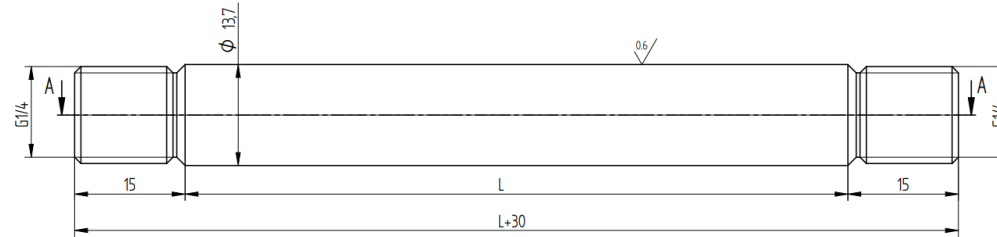

Pipe Size - 1/4
Pipe for CH06E

CH06-ER

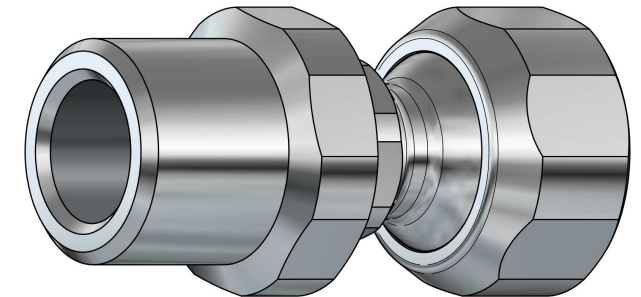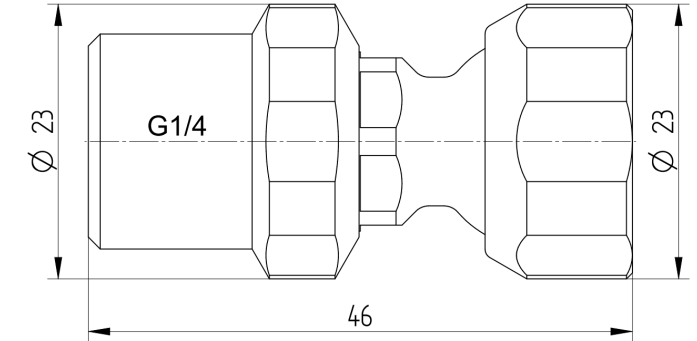

S06 Chain Unit Extension Front Adaptor

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 17 [mm] (0.67")
Internal Diameter: 6.5 [mm] (0.256")
Thread: G1/4
Tooling: SW 22
Material: Austenitic Stainless Steel
Temperature Range: -30°C to 120°C (-20°F to 250°F)



S06 Chain Unit Pipe Extension



S06 Chain Unit Extension Rear Adaptor

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 46 [mm] (1.8")
Internal Diameter: 6.5 [mm] (0.256")
Thread: G1/4
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

CH06-MZ

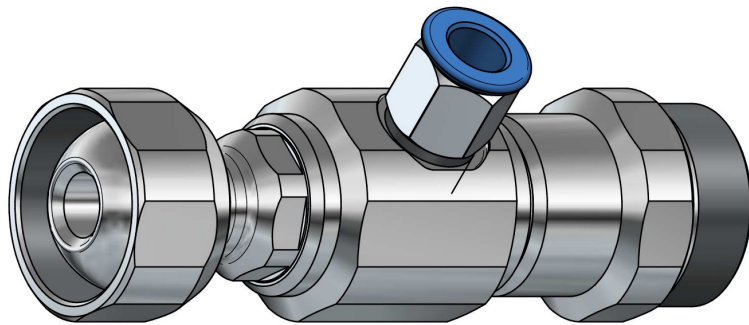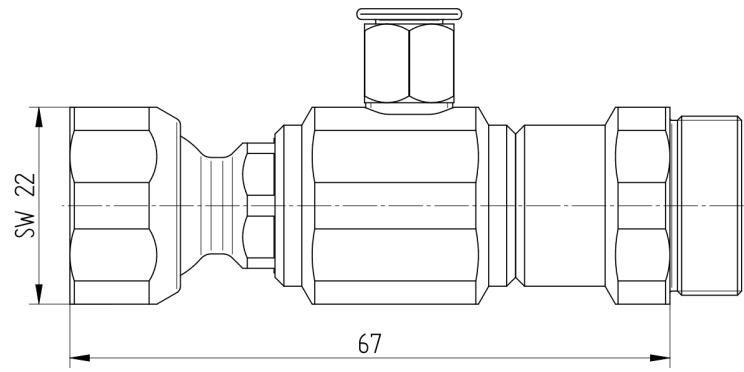

S06 Chain Unit Aeroforce™

SmarTec Line: S06

External Diameter: 23 [mm] (0.9")

Effective Length: 67 [mm] (2.64")

Internal Diameter: 6.5 [mm] (0.256")



Air Tube: 6X4

Tooling: SW 22

Material: Austenitic Stainless Steel

Temperature Range: -30°C to 120°C (-20°F to 250°F)



JD06

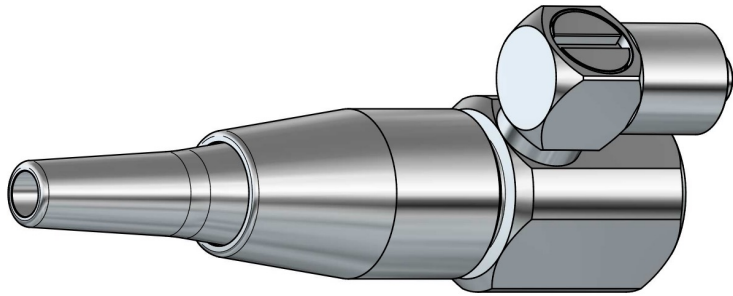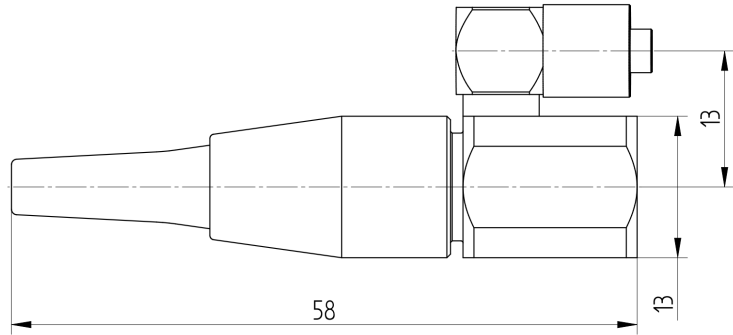

S06 Smart Jet

SmarTec Line: S06
Chain Adaptor: AJ06
External Diameter: 15 [mm] (0.6")
Effective Length: 58, 13 [mm] (2.8", 0.51")
Internal Diameter: 6.5 [mm] (0.256")
Rear Thread: G1/8
Tooling: SW 13
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

JS06

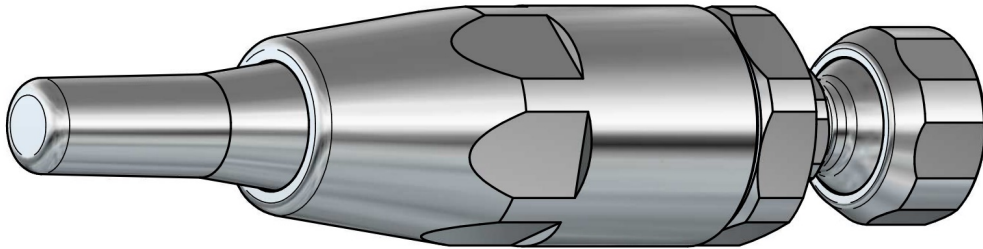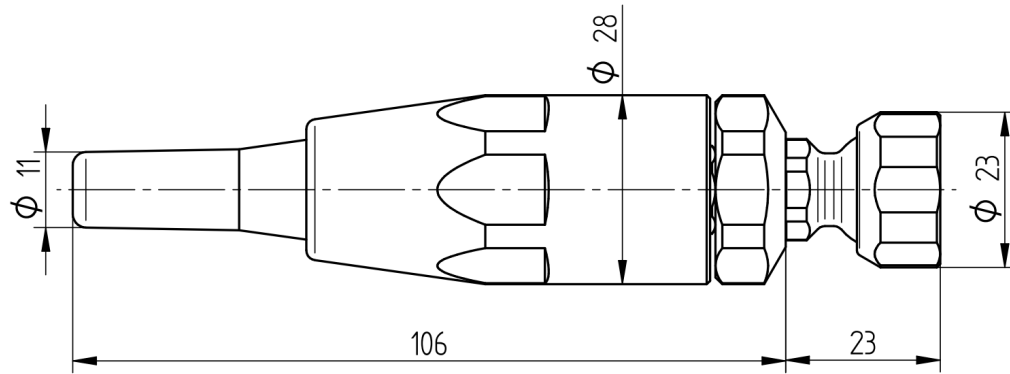

S06 Adjustable Jet

SmarTec Line: S06

External Diameter: 28 [mm] (1.1")

Effective Length: 129 [mm] (5")



Internal Diameter: 6.5 [mm] (0.256")

Tooling: SW 22



Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)



JH06-D25

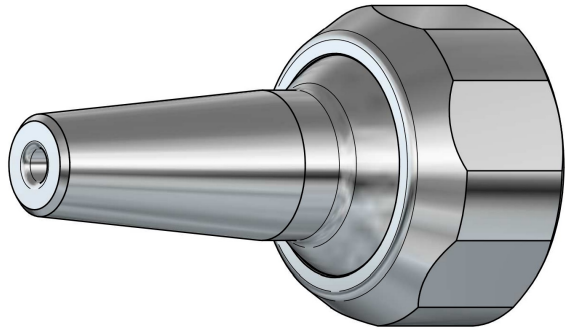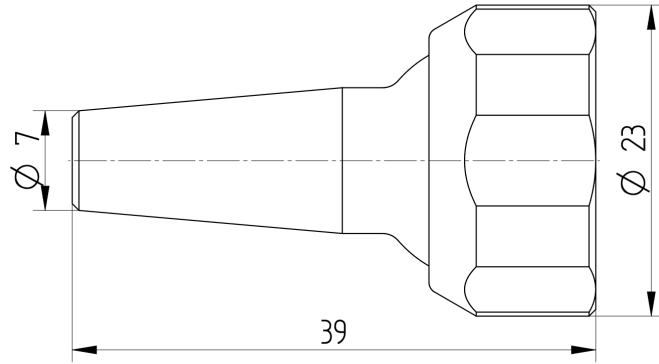

JH06-D30

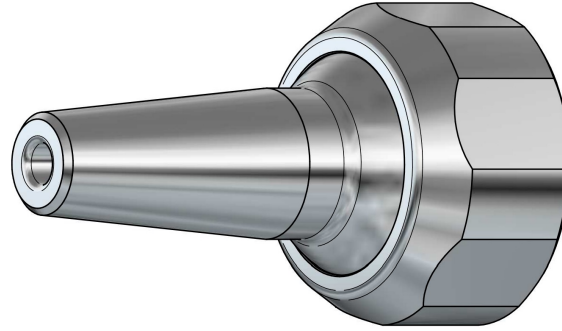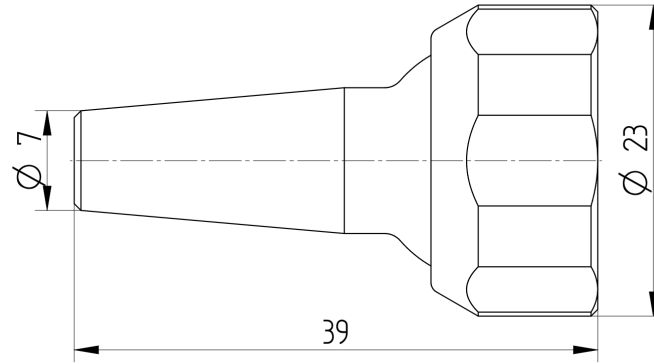

JH06-D35

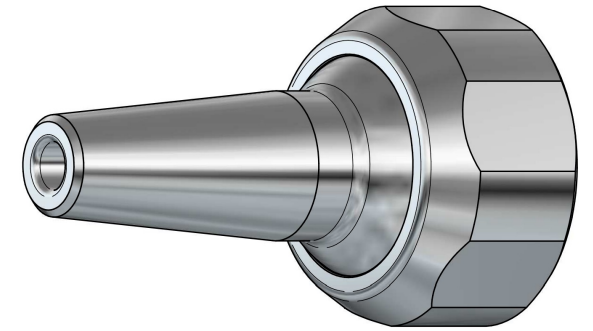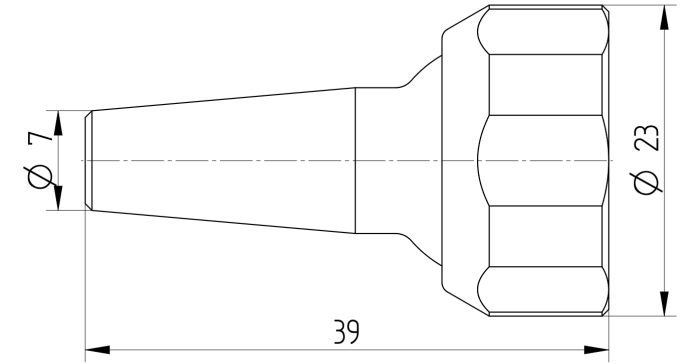

S06 Chain Jet Basic 2.5 mm

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 39 [mm] (1.54")
Jet Diameter: 2.5 [mm] (0.1")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



S06 Chain Jet Basic 3 mm

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 39 [mm] (1.54")
Jet Diameter: 3 [mm] (0.12")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Jet Basic 3.5 mm

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 39 [mm] (1.54")
Jet Diameter: 3.5 [mm] (0.14")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



JM06-A04

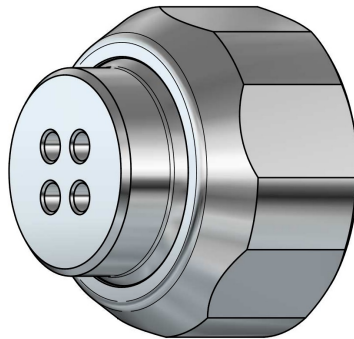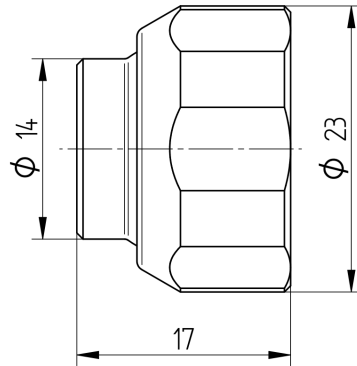

S06 Chain Jet Basic 4 Jets

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 17 [mm] (0.67")
Jet Diameter: 2 [mm] (0.08")
Number of Jets: 4
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



JM06-A08

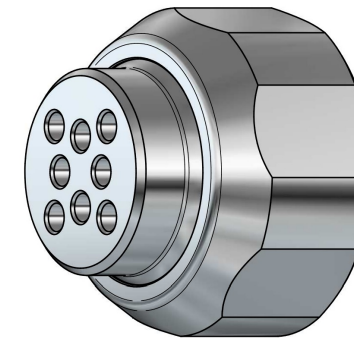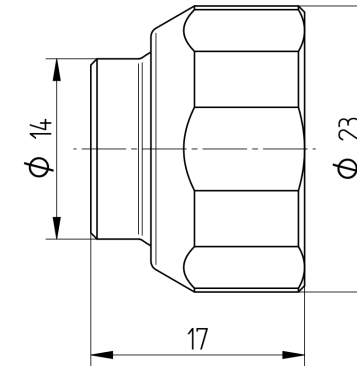

S06 Chain Jet Basic 8 Jets

SmarTec Line: S06
External Diameter: 23 [mm] (0.9")
Effective Length: 17 [mm] (0.67")
Jet Diameter: 2 [mm] (0.08")
Number of Jets: 8
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



JM06-P03

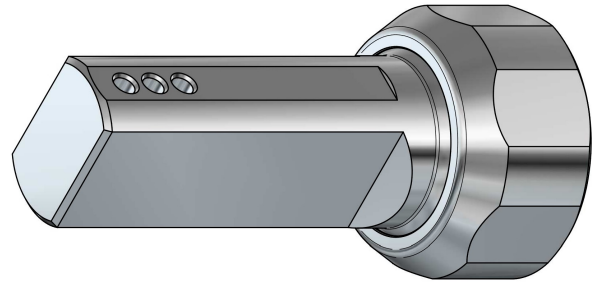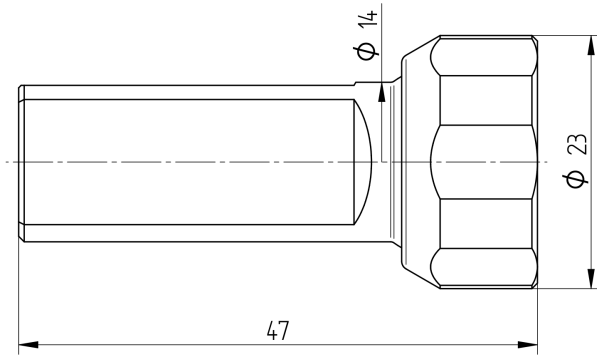

S06 Chain Jet Extended 90° 3 Jets

SmarTec Line: S06
 Angle: 90 °
 External Diameter: 23 [mm] (0.9")
 Effective Length: 47 [mm] (1.85")
 Jet Diameter: 2 [mm] (0.08")
 Number of Jets: 3
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JM06-P06

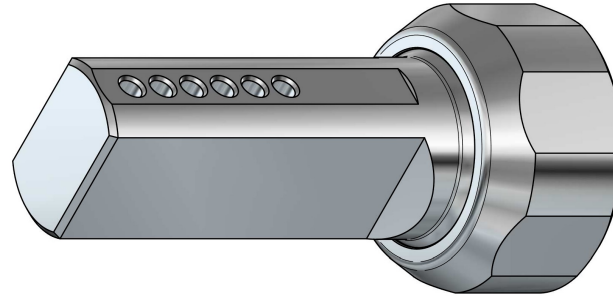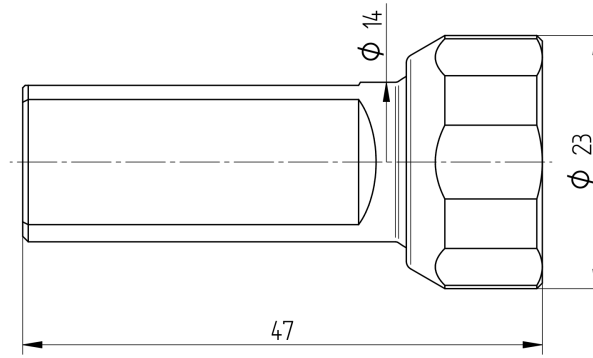

S06 Chain Jet Extended 90° 6 Jets

SmarTec Line: S06
 Angle: 90 °
 External Diameter: 23 [mm] (0.9")
 Effective Length: 47 [mm] (1.85")
 Jet Diameter: 2 [mm] (0.08")
 Number of Jets: 6
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JM06-P09

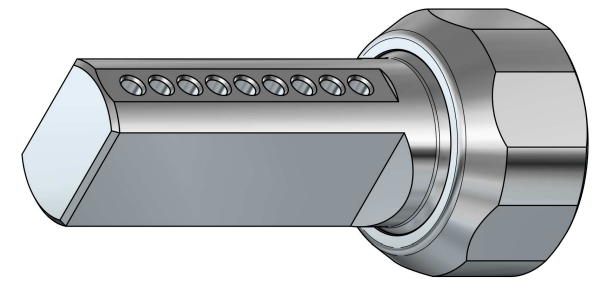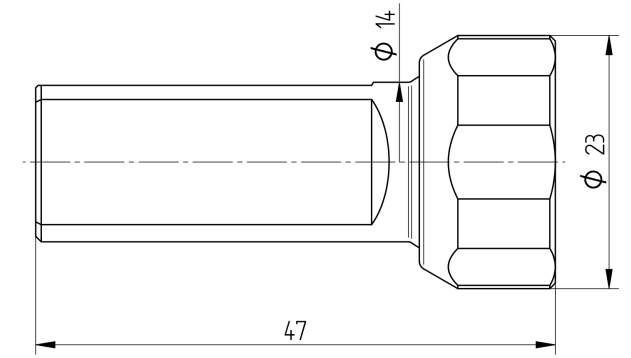

S06 Chain Jet Extended 90° 9 Jets

SmarTec Line: S06
 Angle: 90 °
 External Diameter: 23 [mm] (0.9")
 Effective Length: 47 [mm] (1.85")
 Jet Diameter: 2 [mm] (0.08")
 Number of Jets: 9
 Tooling: SW 22
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)

JM06-S30

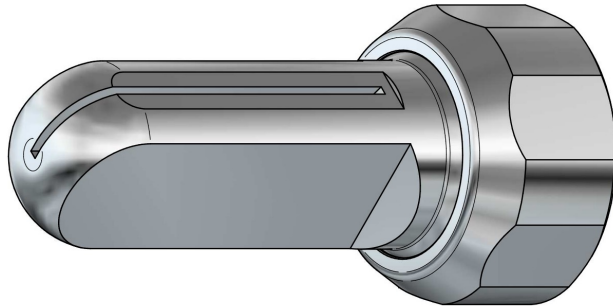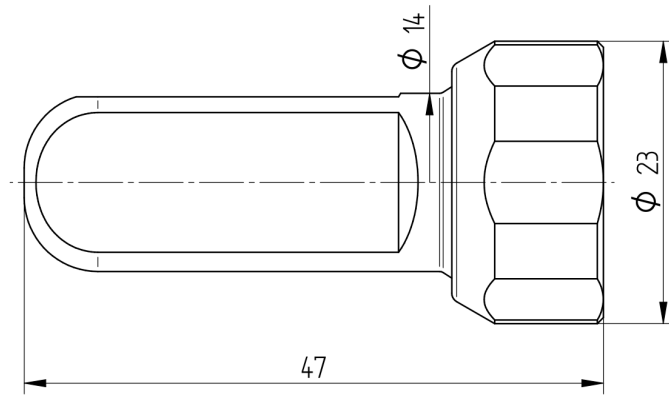

S06 Chain Slot-Jet

SmarTec Line: S06

Slot Length: 30 [mm] (1.18")

Slot Thickness: 0.8 [mm] (0.03")

External Diameter: 23 [mm] (0.9")



Effective Length: 47 [mm] (1.85")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)



JF06-D20

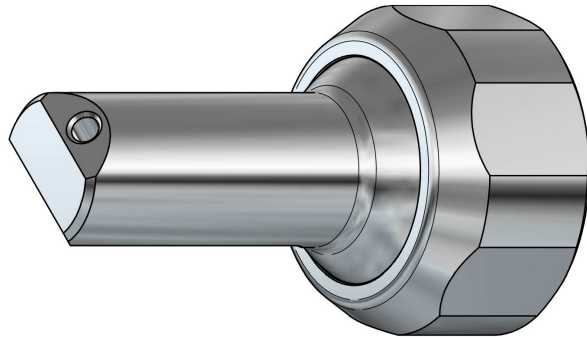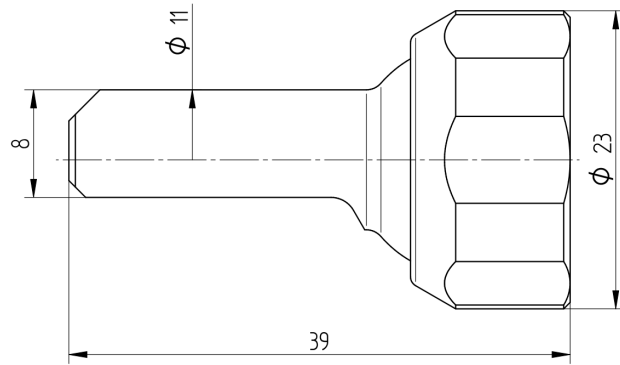

S06 Chain Jet Extended 45° 2 mm

SmarTec Line: S06
Angle: 45 °
External Diameter: 23 [mm] (0.9")
Effective Length: 39 [mm] (1.54")
Jet Diameter: 2[mm] (0.08")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



JF06-D25

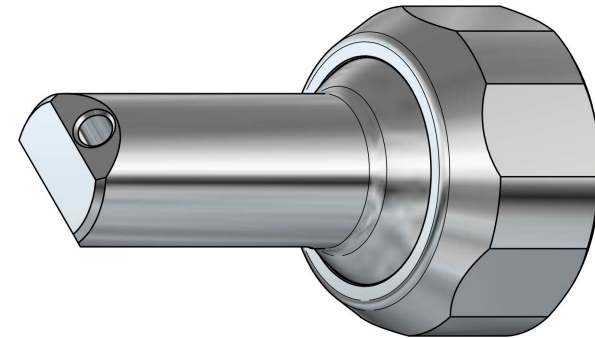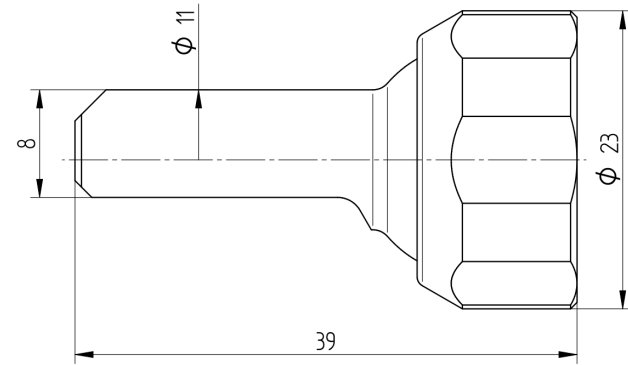



S06 Chain Jet Extended 45° 2.5 mm

SmarTec Line: S06
Angle: 45 °
External Diameter: 23 [mm] (0.9")
Effective Length: 39 [mm] (1.54")
Jet Diameter: 2.5 [mm] (0.1")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



JP06-D25

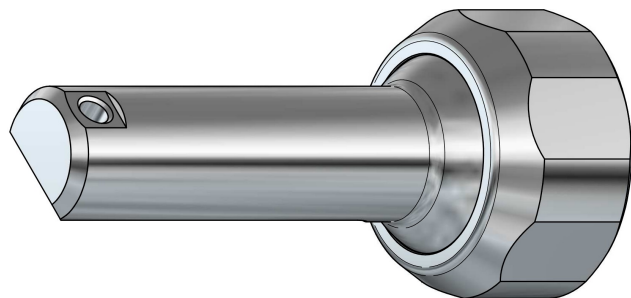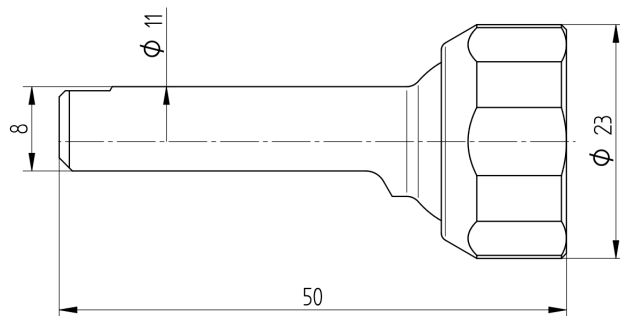

JP06-D30

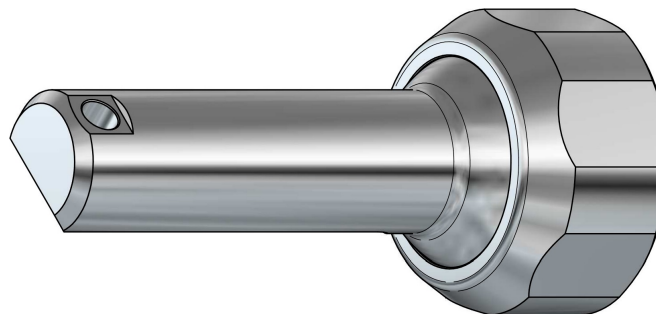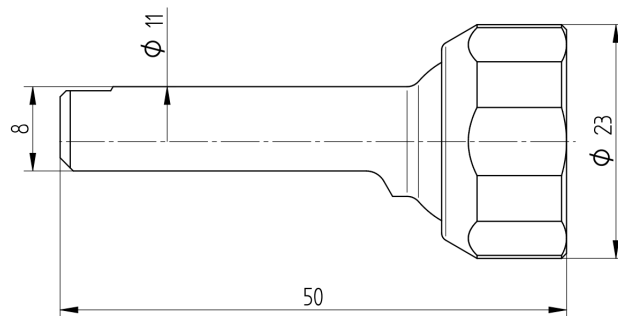

JP06-D35

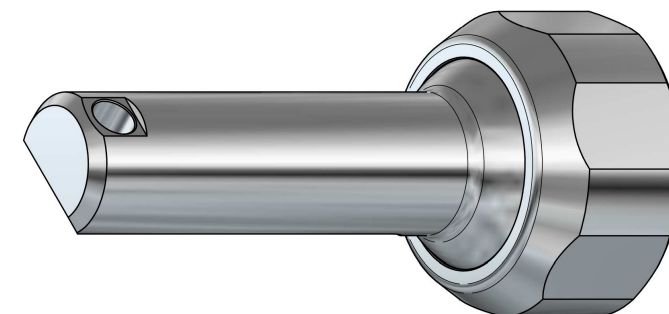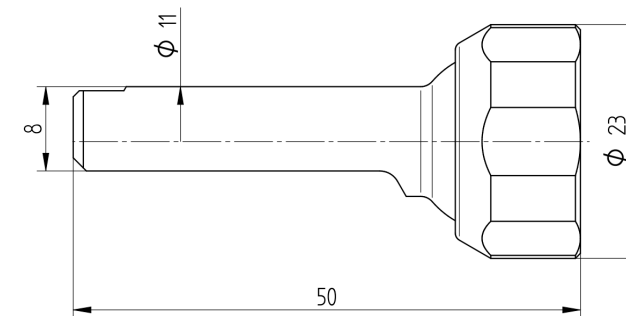

S06 Chain Jet Extended 90° 2.5 mm

SmarTec Line: S06

Angle: 90 °

External Diameter: 23 [mm] (0.9")

Effective Length: 50 [mm] (1.97")

Jet Diameter: 2.5 [mm] (0.1")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Jet Extended 90° 3 mm

SmarTec Line: S06

Angle: 90 °

External Diameter: 23 [mm] (0.9")

Effective Length: 50 [mm] (1.97")

Jet Diameter: 3 [mm] (0.12")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

S06 Chain Jet Extended 90° 3.5 mm

SmarTec Line: S06

Angle: 90 °

External Diameter: 23 [mm] (0.9")

Effective Length: 50 [mm] (1.97")



Jet Diameter: 3.5 [mm] (0.14")

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)



JV06-D14

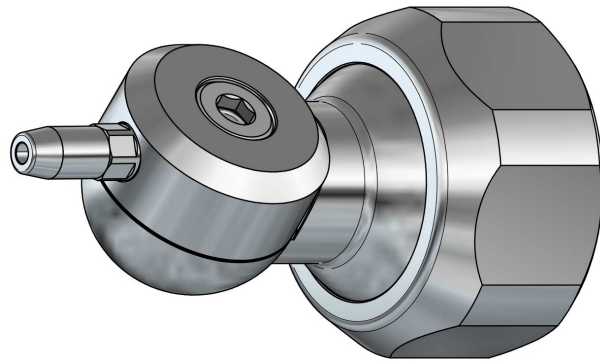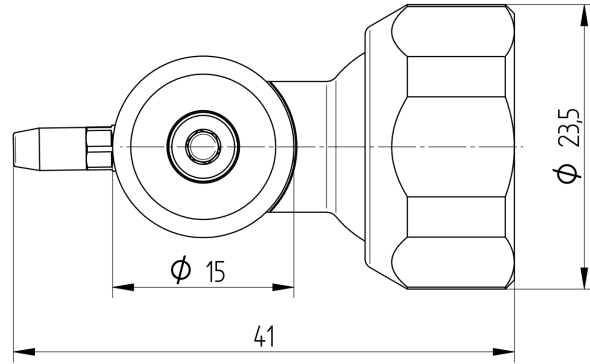

S06 Chain Jet Variable 1.4 mm

SmarTec Line: S06
Angle: Variable
External Diameter: 23.5 [mm] (0.925")
Effective Length: 41 [mm] (1.614")
Jet Diameter: 1.4 [mm] (0.024")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)



JV06-D18

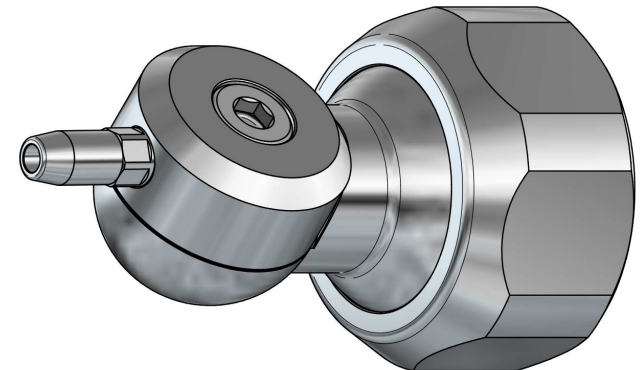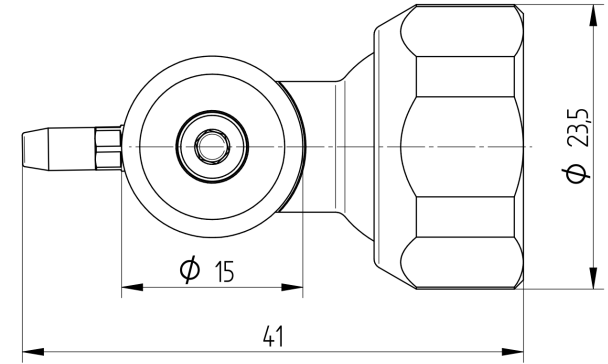

S06 Chain Jet Variable 1.8 mm

SmarTec Line: S06
Angle: Variable
External Diameter: 23.5 [mm] (0.925")
Effective Length: 41 [mm] (1.614")
Jet Diameter: 1.8 [mm] (0.047")
Tooling: SW 22
Material: Austenitic Stainless Steel / NBR (Buna-N)
Temperature Range: -30°C to 120°C (-20°F to 250°F)

JB06

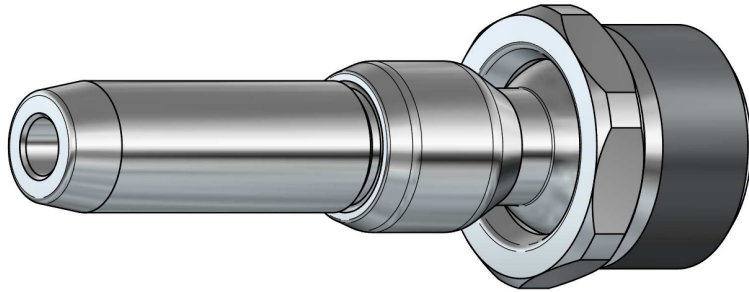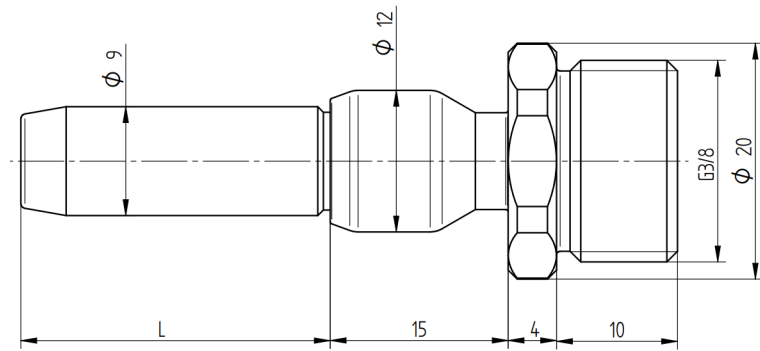

Cat No.	L	D
JB06-S20	15	2.0
JB06-S40	15	4.0
JB06-S60	15	6.0
JB06-M20	30	2.0
JB06-M40	30	4.0
JB06-M60	30	6.0
JB06-L20	60	2.0
JB06-L40	60	4.0
JB06-L60	60	6.0

S06 Block Jet Straight Modular

SmarTec Line: S06

External Diameter: 20 [mm] (0.79")

Effective Length: 34, 49, 79 [mm] (1.34", 1.93", 3.1")

Jet Diameter: 2, 4, 6 [mm] (0.08", 0.16", 0.24")



Tooling: SW 18

Thread: G3/8

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)



JB06-V20

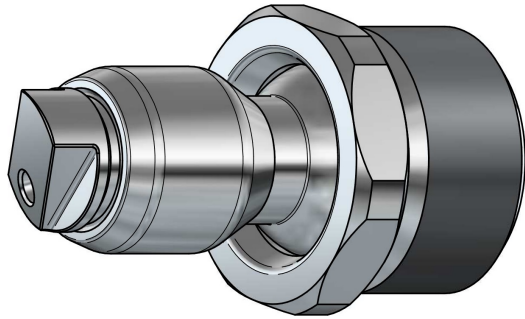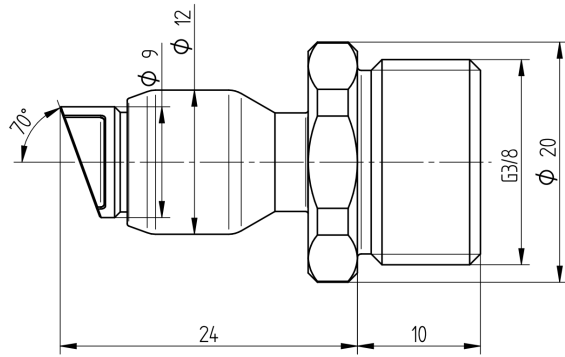

S06 Block Jet 0° to 40° 2 mm

SmarTec Line: S06
 External Diameter: 20 [mm] (0.79")
 Effective Length: 24 [mm] (0.94)
 Jet Diameter: 2 [mm] (0.08")
 Max Horizontal Angle: 40°
 Min Horizontal Angle: 0°
 Tooling: SW 18
 Thread: G3/8
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JB06-V25

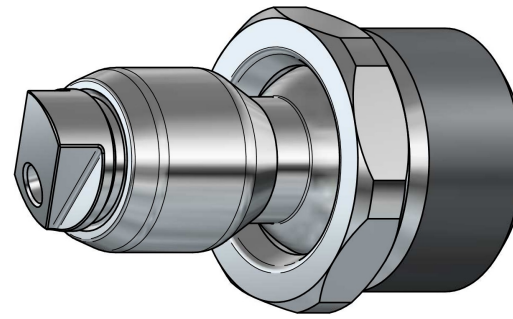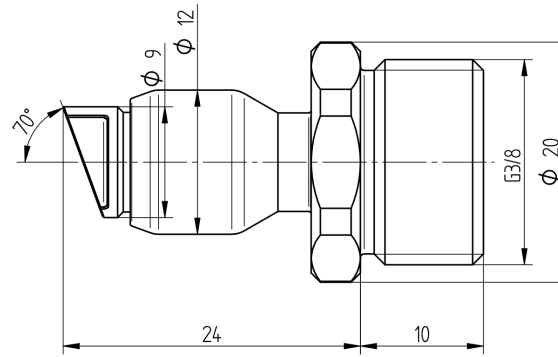

S06 Block Jet 0° to 40° 2.5 mm

SmarTec Line: S06
 External Diameter: 20 [mm] (0.79")
 Effective Length: 24 [mm] (0.94)
 Jet Diameter: 2.5 [mm] (0.1")
 Max Horizontal Angle: 40°
 Min Horizontal Angle: 0°
 Tooling: SW 18
 Thread: G3/8
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JB06-V30

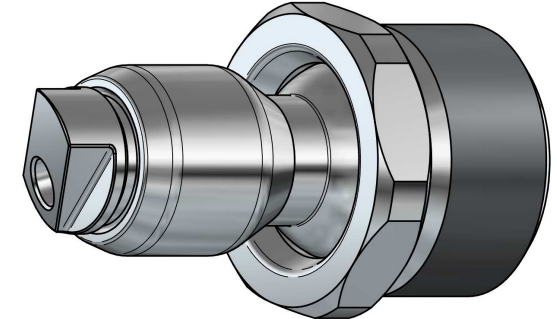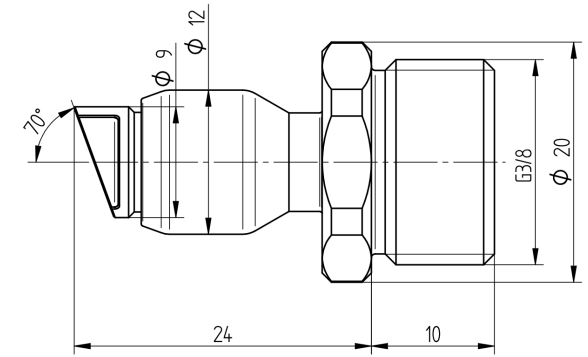

S06 Block Jet 0° to 40° 3 mm

SmarTec Line: S06
 External Diameter: 20 [mm] (0.79")
 Effective Length: 24 [mm] (0.94)
 Jet Diameter: 3 [mm] (0.12")
 Max Horizontal Angle: 40°
 Min Horizontal Angle: 0°
 Tooling: SW 18
 Thread: G3/8
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JB06-W20

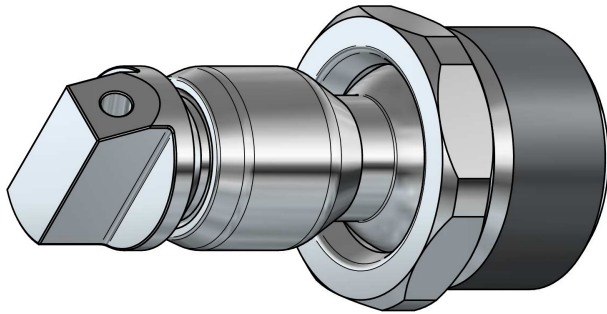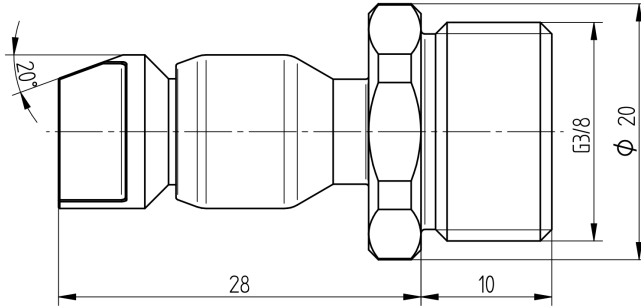

S06 Block Jet 50° to 90° 2 mm

SmarTec Line: S06
 External Diameter: 20 [mm] (0.79")
 Effective Length: 28 [mm] (1.1")
 Jet Diameter: 2 [mm] (0.08")
 Max Horizontal Angle: 90°
 Min Horizontal Angle: 50 °
 Tooling: SW 18
 Thread: G3/8
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JB06-W25

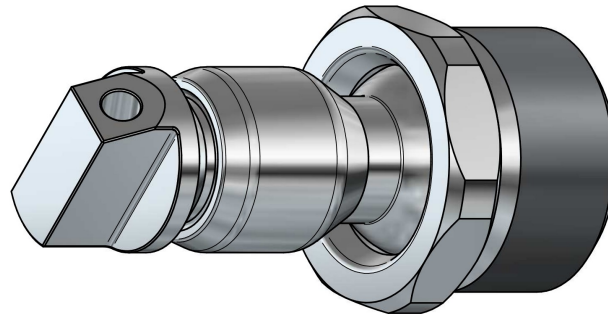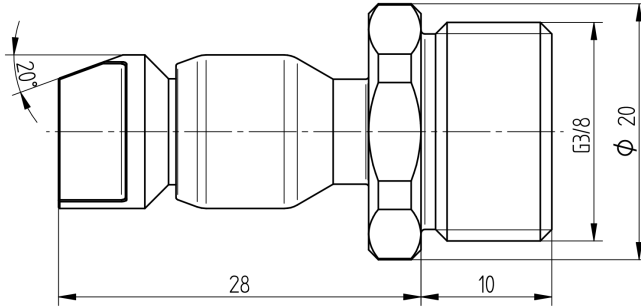

S06 Block Jet 50° to 90° 2.5 mm

SmarTec Line: S06
 External Diameter: 20 [mm] (0.79")
 Effective Length: 28 [mm] (1.1")
 Jet Diameter: 2.5 [mm] (0.1")
 Max Horizontal Angle: 90°
 Min Horizontal Angle: 50 °
 Tooling: SW 18
 Thread: G3/8
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)



JB06-W30

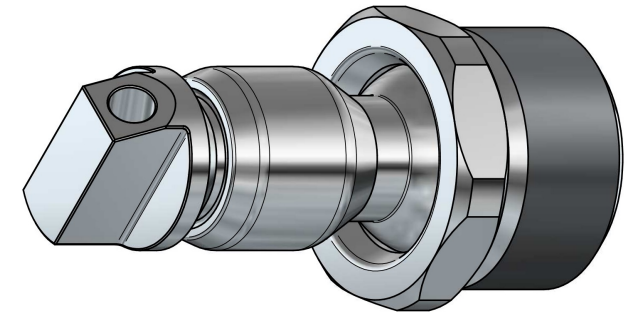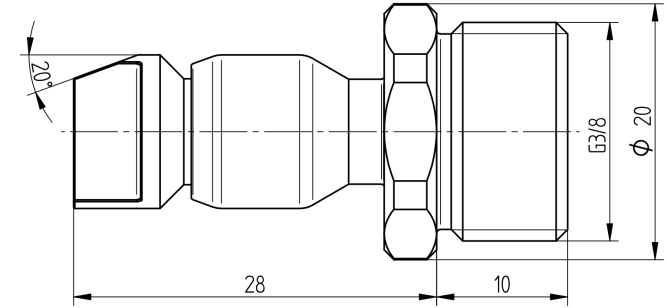

S06 Block Jet 50° to 90° 3 mm

SmarTec Line: S06
 External Diameter: 20 [mm] (0.79")
 Effective Length: 28 [mm] (1.1")
 Jet Diameter: 3 [mm] (0.12")
 Max Horizontal Angle: 90°
 Min Horizontal Angle: 50 °
 Tooling: SW 18
 Thread: G3/8
 Material: Austenitic Stainless Steel / NBR (Buna-N)
 Temperature Range: -30°C to 120°C (-20°F to 250°F)

JR06-IN

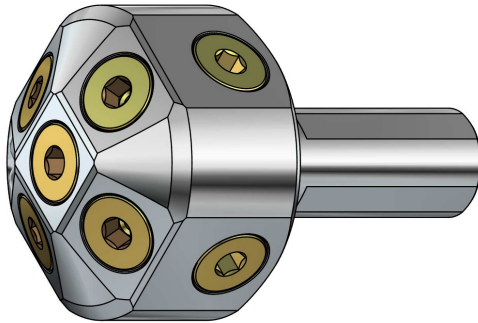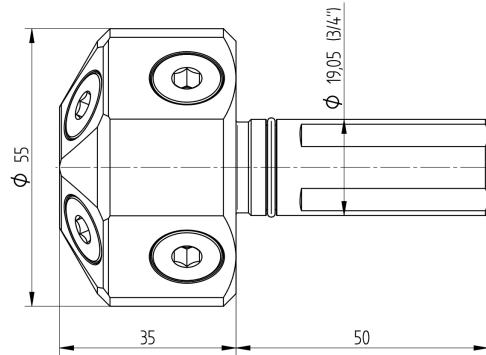

S06 Machine Cleaning Jet Imperial

SmarTec Line: S06

External Diameter: 55 [mm] (2.165")

Clamping Diameter: 19.05 [mm] (0.75")

Clamping Length: 50 [mm] (1.97")

Effective Length: 35 [mm] (1.38")

Internal Diameter: 6.5 [mm] (0.256")



Flats: 18

Thread: G1/4

Material: Austenitic Stainless Steel / NBR / Brass

Temperature Range: -30°C to 120°C (-20°F to 250°F)

JR06-ME

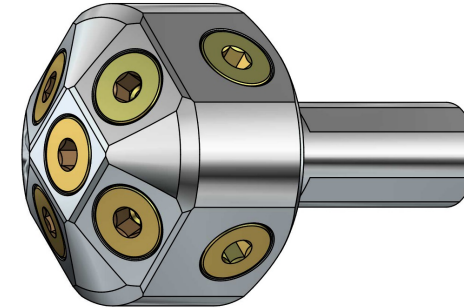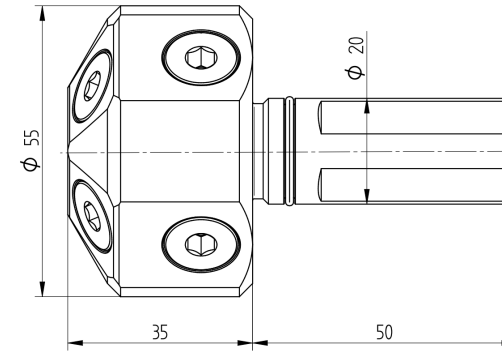

S06 Machine Cleaning Jet Metric

SmarTec Line: S06

External Diameter: 55 [mm] (2.165")

Clamping Diameter: 20 [mm] (0.79")

Clamping Length: 50 [mm] (1.97")

Effective Length: 35 [mm] (1.38")

Internal Diameter: 6.5 [mm] (0.256")



Flats: 18

Thread: G1/4

Material: Austenitic Stainless Steel / NBR / Brass

Temperature Range: -30°C to 120°C (-20°F to 250°F)

VL00

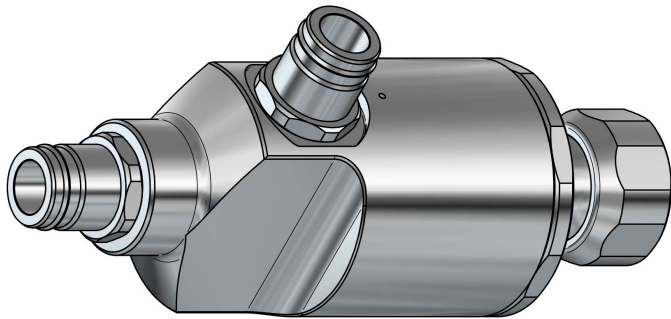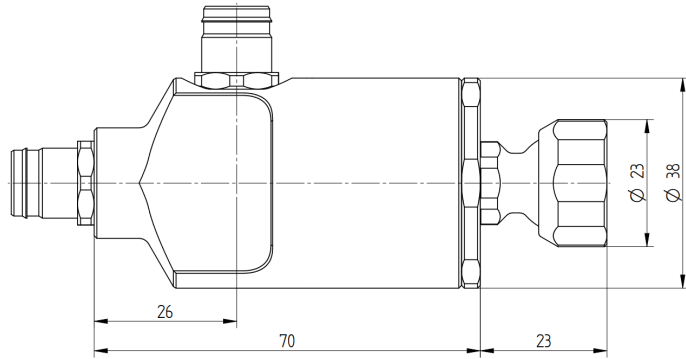

Mechanical Valve

SmarTec Line: S06

External Diameter: 38 [mm] (1.5")

Effective Length: 81 [mm] (3.2")

Internal Diameter: 6.5 [mm] (0.256")

Air Fittings connection: G1/4

Tooling: SW 22

Material: Austenitic Stainless Steel / NBR (Buna-N)

Temperature Range: -30°C to 120°C (-20°F to 250°F)

KIT 06			
No.	Product Code	Product Description	Quantity
1	AM06-R125	Machine adaptor R1/8	1
2	AM06-R250	Machine adaptor R1/4	1
3	AM06-R375	Machine adaptor R3/8	1
4	CH06-AS	Chain unit straight S	6
5	CH06-FS	Chain unit 45° S	1
6	CH06-PS	Chain unit 90° S	1
7	CH06-MZ	Aeroforce™ 06	1
8	JH06-D25	Chain jet basic 2.5 mm	1
9	JH06-D30	Chain jet basic 3 mm	1
10	JH06-D35	Chain jet basic 3.5 mm	1
11	VL00	Mechanical valve	1
12	EX-PCV08	Pneumatic check valve for A tube 08	1
13	EX-PAR08	Pneumatic air regulator for A tube 08	1
14	EQ06-FK80	S06 Flat key short	1

Lines 1, 2 and 3 may be ordered with:

No.	Product Code	Product Description	Quantity
1	AM06-G125	Machine adaptor G1/8	1
2	AM06-G250	Machine adaptor G1/4	1
3	AM06-G375	Machine adaptor G3/8	1